




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04L 12/58, G06F 17/60, H04N 1/00, H04M 3/50</b>		<b>A1</b>	(11) International Publication Number: <b>WO 99/57859</b>
			(43) International Publication Date: 11 November 1999 (11.11.99)
(21) International Application Number: <b>PCT/US99/09595</b>		(81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: <b>30 April 1999 (30.04.99)</b>			
(30) Priority Data: 09/073,068      4 May 1998 (04.05.98) <b>US</b>		<b>Published</b> <i>With international search report.</i>	
(71) Applicant: SIEMENS INFORMATION AND COMMUNICATION NETWORKS, INC. [US/US]; 900 Broken Sound Boulevard, Boca Raton, FL 33487 (US).			
(72) Inventors: SHAFFER, Shmuel; 1211 Cowper Street, Palo Alto, CA 94301 (US). BEYDA, William, J.; 21580 Edward Way, Cupertino, CA 95014 (US).			
(74) Agents: CODISPOTI, Joseph, S. et al.; Siemens Corporation, Intellectual Property Dept., 186 Wood Avenue South, Iselin, NJ 08830 (US).			

(54) Title: METHOD AND APPARATUS FOR TRANSMITTING ADDRESS CHANGES

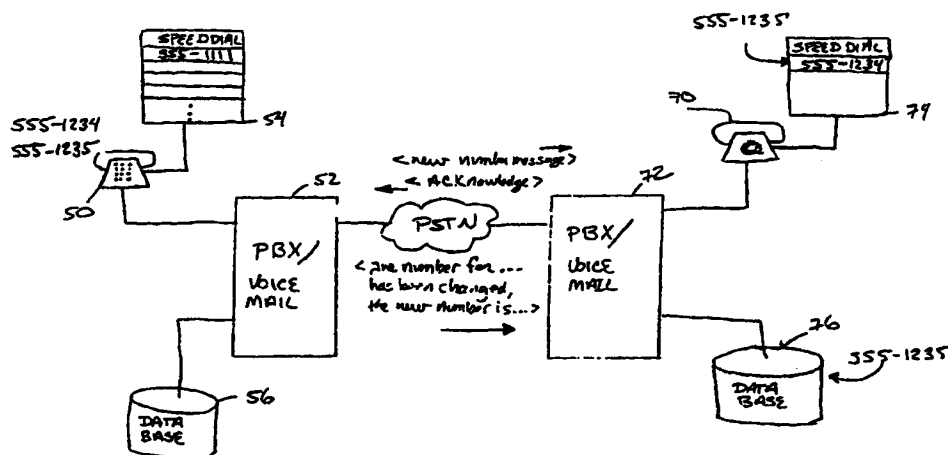

## (57) Abstract

A communication system for transmitting address changes. A communication system includes a source communication system and one or more destination communication systems, each of which is identified by a unique number or address. A memory in the source communication system maintains a record of each destination communication system that communicates with it. If the number or address of the source communication is changed, the source communication system generates a new number or address message which is transmitted to each of the destination communication systems. The destination communication systems receive the new number or address message and update a memory to reflect the new number or address of the source communication system. Those destination systems that are able to read the new number or address message and update a record of the number or address for the source communication system generate an acknowledge signal which is transmitted to the source communication system. The source communication system may transmit a human readable new number or address message to those destination communication systems that have not transmitted the acknowledge signal. The communications systems may comprise telephones, facsimile machines or computers having e-mail or IP addresses.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## METHOD AND APPARATUS FOR TRANSMITTING ADDRESS CHANGES

### Field of the Invention

The present invention relates to communication systems in general, and in particular to systems for recording address changes.

### Background of the Invention

With the current advancements in communication technology, most people now have several methods by which they can be contacted. These methods include telephones, fax machines, electronic mail accounts, pagers, etc. In general, each of these devices has a number or address that associates the device with a particular individual or location.

As will be appreciated, the task of updating a list of numbers or addresses used to reach a desired individual can be time-consuming and prone to error. For example, area codes are often modified or people move from one location to another thereby rendering their old telephone number out of date. Currently, most address changes are recorded by a trial and error process. A user calls or attempts to send a message to an old number or address. In the case of a telephone number that has been changed, an error message is played indicating that the number has been changed and the user must record the new number by hand. However, in the case of some technologies, like electronic mail, an error message may be produced that indicates that a message could not be delivered but does not indicate a new address that should be used.

Given the shortcomings in the prior art, there is a need for a method of simplifying the task of maintaining an address book with telephone numbers and/or addresses of desired recipients.

### Summary of the Invention

The present invention is a communication system that operates to automatically communicate a change in a number or address of a source communication system. A memory associated with the source communication system stores the numbers or addresses of those destination communication systems that communicate with the source communication system. A new number or address message is generated that indicates the new number or address for the source communication system and the message is transmitted to each of the destination communication systems. The destination communication systems read the new number or address message and update a memory with the new number or address of the source communication system. The destination communication systems preferably transmit an acknowledge signal to the source communication system if they were able to read the message and update the source communication system's number or address. For those systems unable to read the new number or address message, a voice or text message is generated by the source communication system and transmitted to the destination communication systems in order to inform a human operator of the change in the number or address of the source communication system. The voice or text message may also be transmitted to the destination communication systems that were able to read the new number or address message in order to inform a user that the memories of their communication system have been updated.

The present invention can be used to update the numbers or addresses of a variety of communication systems including telephone systems, facsimile machines or computer systems having an e-mail or Internet Protocol address.

### Brief Description of the Drawings

The foregoing aspects and many of the attendant advantages of this invention will become more readily appreciated as the same becomes better understood by reference to the following detailed description, when taken in conjunction with the accompanying drawings, wherein:

FIGURE 1 is a block diagram of a system for updating telephone numbers according to the present invention;

FIGURE 2 is a block diagram of a system for updating the number of a facsimile machine according to the present invention; and

FIGURE 3 is a block diagram of a system for updating an electronic mail address according to the present invention.

### Detailed Description of the Preferred Embodiment

The present invention is a method and apparatus for automatically informing users of a change in a telephone number or address at which a recipient may be contacted. The telephone numbers or addresses are updated without a user having to first encounter an error message.

FIGURE 1 illustrates a telecommunication system in which the present invention is implemented. The system includes a source telephone 50 that is preferably connected through a private branch exchange (PBX) 52 to the public switched telephone network (PSTN). The source telephone 50 typically has a local "speed dial" memory 54 that stores one or more frequently dialed telephone numbers. In addition, the PBX 52 may have a database 56 that stores a record of all the numbers that have been dialed from the source telephone 50 or if the PBX is capable of decoding ANI messages, the database may keep a record of all the telephone numbers that have called the source telephone 50 within some predefined period of time, e.g. six months.

As frequently happens in today's communication environment, the telephone number of the source telephone 50 may be changed. For example, the source telephone may be assigned an original number such as 555-1234, and this number may be changed to a new number such as 555-1235. A user who is trying to contact the person at the telephone 50 using its previous number would typically encounter an error message indicating, "The number you have dialed has been changed. The new number is 555-1235. Please hang up and try your call again." This is not only frustrating for callers wishing to contact the person associated with the telephone 50 but is also prone to error if the caller does not copy down the error message correctly.

To facilitate the task of updating a record of telephone numbers, the present invention automatically updates the memories of those telephones that are frequently called by or frequently call the source telephone 50. For example, FIGURE 1 illustrates a destination telephone 70 that is connected through a private branch exchange 72 to the public switched telephone network. The destination telephone has its own speed dial memory 74. In addition, the PBX 72 may have a database 76 that stores a record of all the numbers dialed from the telephone 70 or the numbers of the telephones that have recently called the telephone 70. To inform the destination telephone 70 and other frequently called telephones that its telephone number has been changed, the source telephone 50 recalls from the speed dial memory 54 or the

database 56, the telephone number of those parties who frequently call the telephone 50 or are called from the telephone 50.

To inform the destination telephones of an updated telephone number, several approaches can be taken. First, if the source telephone 50 is associated with a voice mail application program, then a prerecorded audio message can be generated and sent to each telephone number in the list of telephone numbers frequently called or numbers that frequently call the telephone 50. These messages are either played to a recipient who answers the telephone or are recorded on the recipient's voice mail system or answering machine if present.

An alternative approach is to utilize an electronic "new number" signalling message which is broadcast to each of the destination telephones. The destination telephones or PBXs are equipped with a processing unit that is programmed to recognize the message as a new number message and to read from the message the old telephone number and the new telephone number. After reading the new number message, the destination telephone updates its speed dial memory 74 or record in the database 76 with the new telephone number. In addition to including the new telephone number, the new number signalling message may include some security or authorization code to prevent the unauthorized modification of another party's telephone memory.

An acknowledge signal is sent back from the destination telephone 70 or PBX 72 to the source telephone 50 or PBX 52 indicating that the new number message has been read and the record of the sending telephone's number has been updated. The source telephone 50 or PBX 52 can monitor the destination telephones from which an acknowledge signal is received. Those telephones not providing an acknowledge signal may be dialed and played an audio message that indicates the number of the source telephone has been changed. In addition, it may be advantageous to generate an audio message which is sent to the users of the destination telephones that were able to decode the new number message to indicate that their telephone memory has been automatically updated with a new number.

Although the example shown in FIGURE 1 utilizes a PBX to store telephone number data and decode ANI messages, it will be appreciated that the present invention will also work with consumer telephones that store a list of frequently dialed numbers and contain a central processing unit that can decode digital signalling messages. Similarly, although the system shown in FIGURE 1 illustrates the use of the present invention with telephones, it will be appreciated that the

technique could be applied to other communication technologies such as facsimile machines.

FIGURE 2 illustrates a facsimile machine 100 having a memory 102 that stores the telephone numbers of those facsimile machines that are frequently called. If the telephone number of the facsimile machine 100 is changed, a central processing unit within the facsimile machine 100 dials each number in its memory and sends each receiving facsimile machine a new number signalling message indicating that the telephone number of the sending facsimile machine has been changed. If a receiving machine 104 is able to decode the new number message and update its memory 105, an acknowledge signal is sent back to the sending facsimile machine 100. If no acknowledge signal is received, the facsimile machine 100 may generate a facsimile message which when received is printed as a hard copy indicating that the telephone number of the sending facsimile machine has been changed. An operator at the receiving facsimile machines would then read the hard copy message and update the facsimile machine's stored telephone numbers accordingly. Even if the receiving facsimile machine can decode the new number message, a facsimile message that is printed as a hard copy may be transmitted to inform a user that the memory of the facsimile machine has been updated.

FIGURE 3 illustrates how the present invention could be implemented in an electronic mail messaging system. In this example, a computer system 120 is identified by a unique electronic mail (e-mail) or Internet Protocol (IP) address. Messages are sent to other computers or computer systems via a local or wide area computer network, such as the Internet. If the e-mail address or Internet Protocol address of the computer 120 changes, then the computer system reads a list of addresses from a memory or address book that stores the addresses of those computer systems 125, 130 to which e-mail messages are commonly sent or from which e-mail messages are received. Each computer system 125, 130 having an address on the list is then sent a new address message indicating that the e-mail address or IP address for the source computer 120 has been changed. The new address message may be sent in electronic form that can only be read by the receiving computer systems and used to automatically update a memory or address book. Alternatively, the new address messages may be sent as text within a conventional e-mail message asking a user to manually update their address books. Once the memories or address books have been updated, acknowledge messages are sent back to the source computer system 120 that indicate that the addresses have been updated. In addition, it may be

necessary to send those computers that could read the new address message a text based e-mail to inform the operators of the computers that the address for the source computer 120 has changed and that their computer's memory or address book has been automatically updated.

- 5           As can be seen from the above, the present invention is a system for automatically informing users of a change in a telephone number or other communication address. Using the present invention, users who communicate frequently no longer have to be subjected to error messages indicating that a number or address has been changed. Instead, the devices which they use to communicate
- 10       are updated any time a number or address changes.



The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A method of updating a number or address of a source communication system, comprising:

recalling from a memory a number or address of one or more destination communication systems that have previously been in communication with the source communication system;

transmitting a message to the one or more destination communication systems that indicates a new number or address for the source communication system; and

receiving the message at the one or more destination communication systems and updating a memory associated with each of the one or more destination communication systems with the new number or address for the source communication system.

2. The method of Claim 1, further comprising:

transmitting an acknowledge signal from the one or more destination communication systems back to the source communication system if the one or more destination communication systems were able to receive the message indicating a new number or address for the source communication system and update a memory that stores the number or address of the source communication system.

3. The method of Claim 2, further comprising:

generating a human readable message that indicates a new number or address for the source communication system

4. The method of Claim 3, wherein the human readable message is transmitted to those destination communication systems that did not transmit an acknowledge signal.

5. The method of Claim 3, wherein the human readable message is transmitted to each of the one or more destination communication systems.

6. The method of Claim 1, wherein the source communication system is a telephone

7. The method of Claim 1, wherein the source communication system is a facsimile machine

8. The method of Claim 1, wherein the source communication system is a computer having an electronic mail or IP address.

9. A communication system including a source communication device that is identified by a unique number or address and one or more destination communication devices that are each identified by a unique number or address comprising:

a memory associated with the source communication device that stores the numbers or addresses of one or more destination communication devices that have previously communicated with the source communication device;

a processor coupled to the source communication device that is programmed to recall the numbers or addresses of the one or more destination communication devices that have previously communicated with the source communication device, the processor being further programmed to generate a message indicating a new number or address for the source communication device and to transmit the message to each of the one or more destination communication devices; and

a processor coupled to each of the one or more destination communication devices that receives the message and updates a memory that stores a number or address for the source communication device.

10. The communication system of Claim 9, wherein the source communication device and the one or more destination communication devices are telephones.

11. The communication system of Claim 9, wherein the source communication device and the one or more destination communication devices are facsimile machines

12. The communication system of Claim 9, wherein the source communication device and the one or more destination communication devices are computers with e-mail or IP addresses.



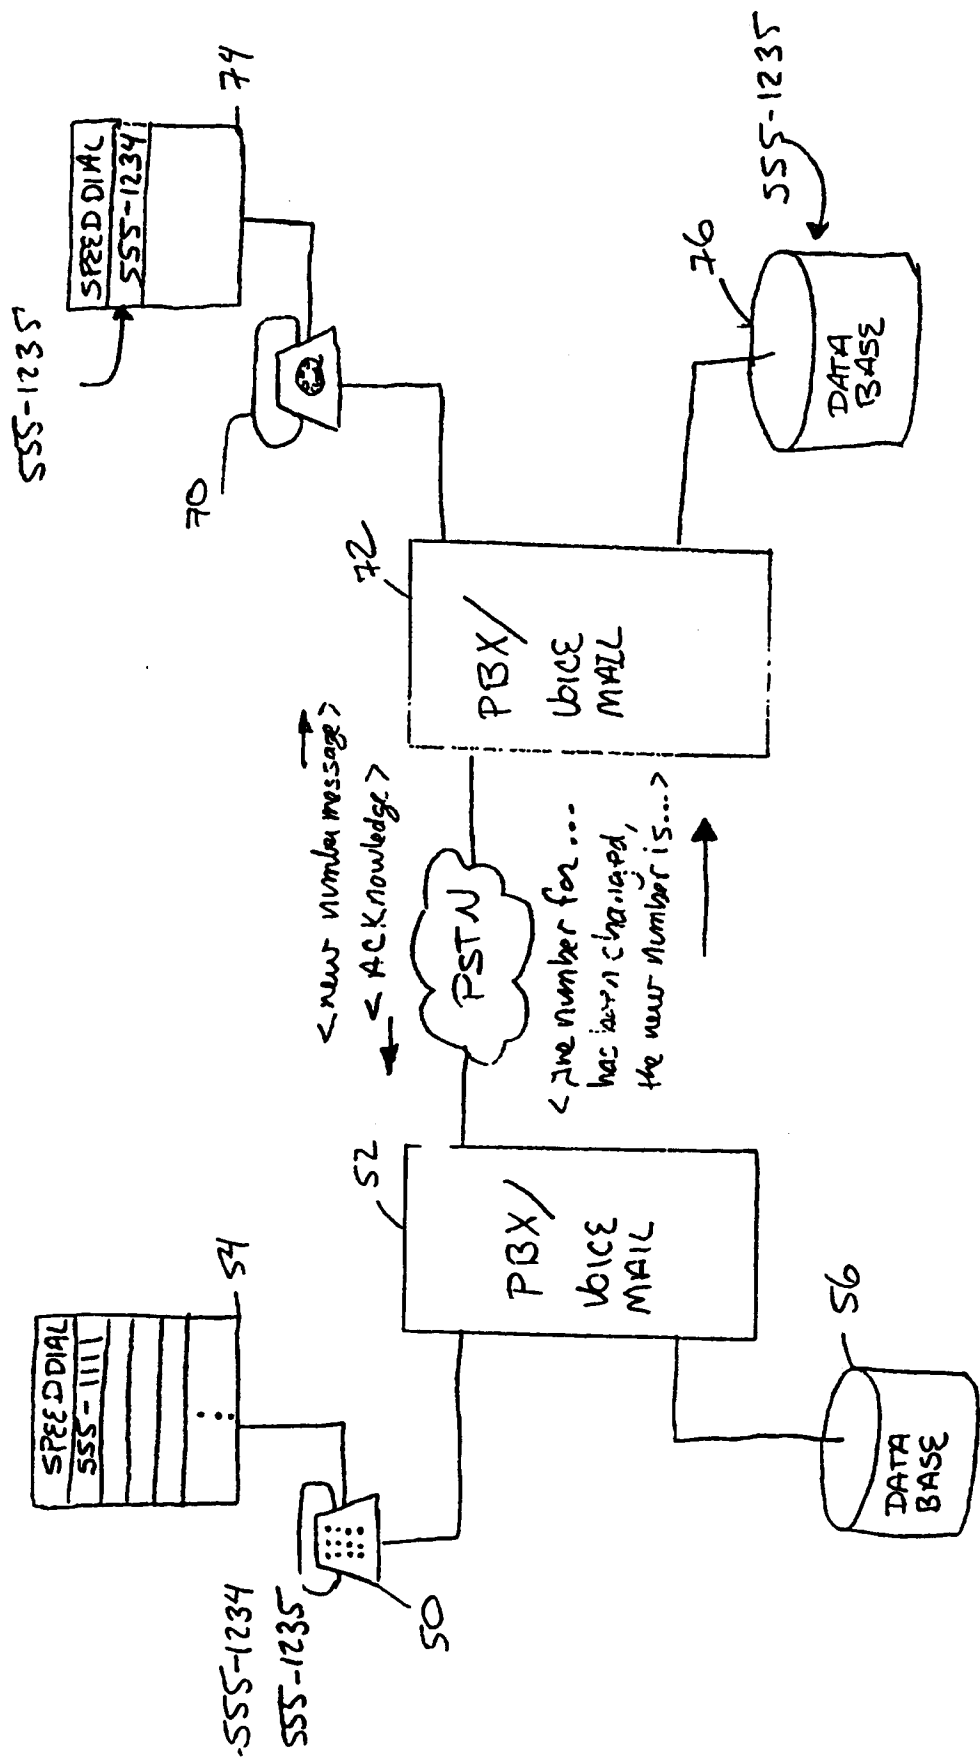


Fig 1

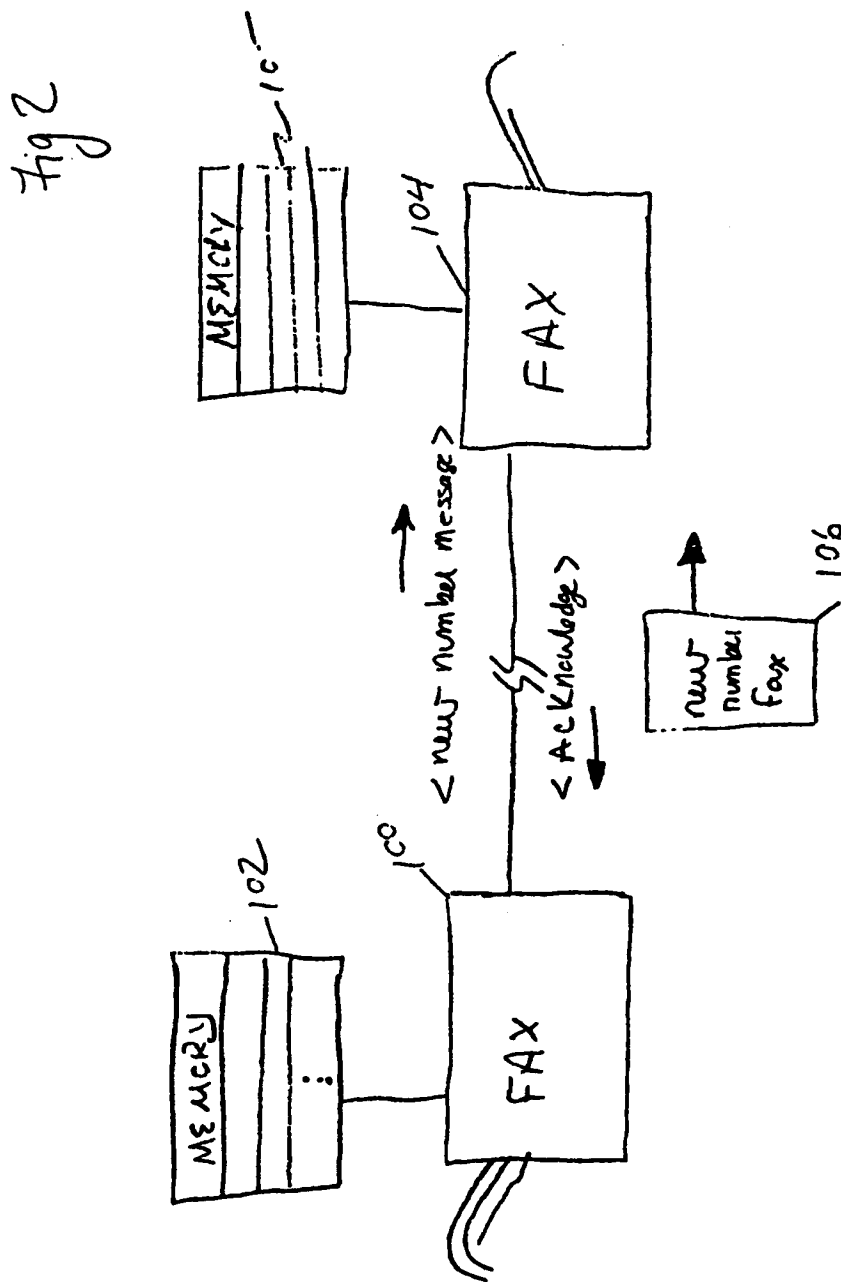

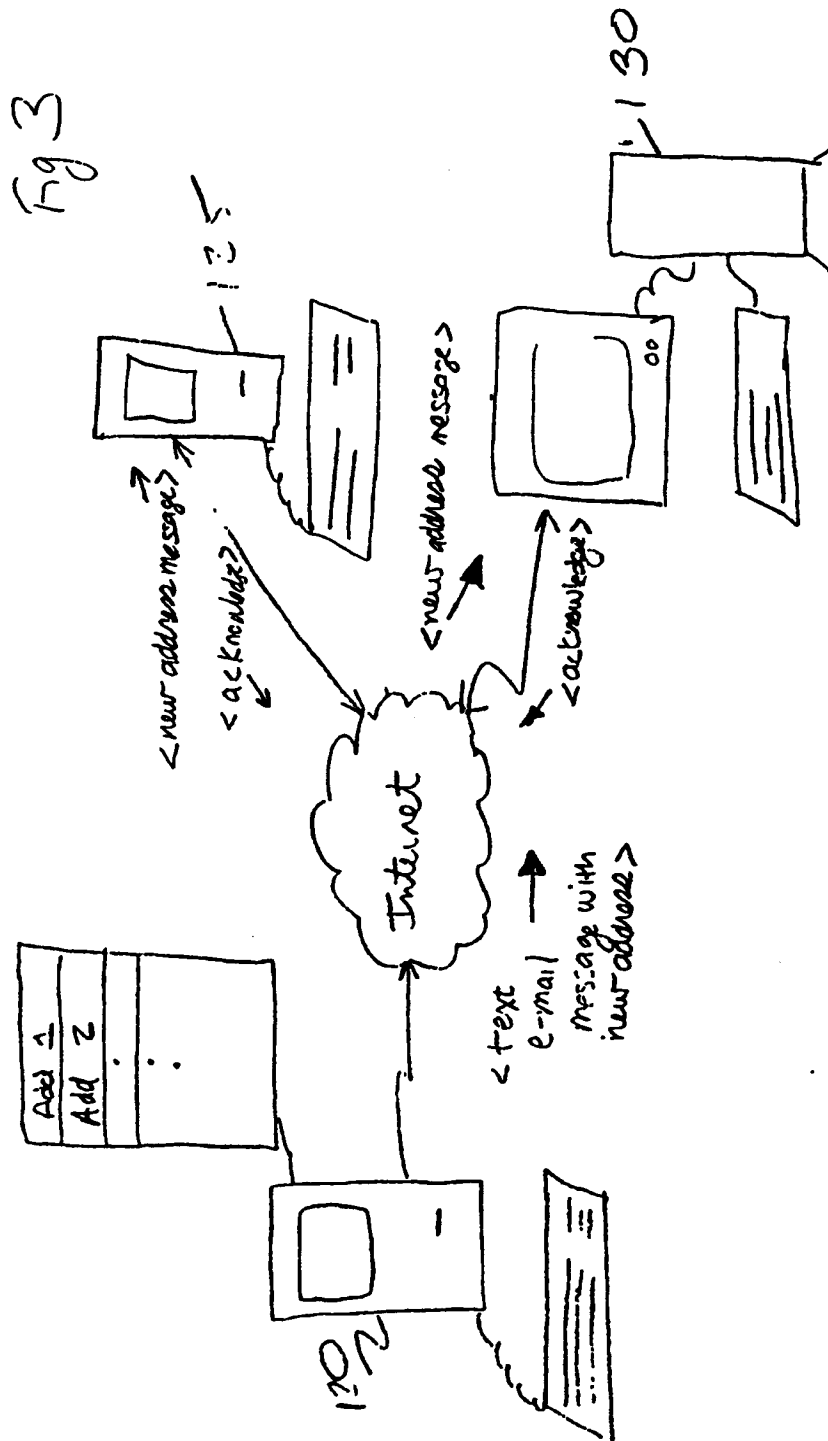

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/09595

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04L12/58 G06F17/60 H04N1/00 H04M3/50

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04L H04M G06F H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>"MAIL ADDRESS CHANGE NOTIFICATION"</p> <p>IBM TECHNICAL DISCLOSURE BULLETIN,</p> <p>'Online!</p> <p>vol. 36, no. 1,</p> <p>1 January 1993 (1993-01-01), pages 70-72,</p> <p>XP000333778</p> <p>ISSN: 0018-8689</p> <p>the whole document</p> <p style="text-align: center;">---</p> <p style="text-align: center;">-/--</p>	<p>1, 3, 4, 8,</p> <p>9, 12</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

14 July 1999

Date of mailing of the international search report

29/07/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Yang, Y

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/09595

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>JP 10 091859 A (CANON KK)  10 April 1998 (1998-04-10)  &amp; US 5 857 073 A (CANON KABUSHIKI KAISHA)  5 January 1999 (1999-01-05)  column 7, line 1 - column 8, line 61  column 4, line 20-33  column 22, line 54 - column 25, line 23  column 26, line 1 - column 28, line 12  column 28, line 40 - column 29, line 52  claims 1-23; figures 1-3,17-20,22-24</p> <p style="text-align: center;">----</p>	<p>1-3,5,7,  9,11</p>
A	<p>"MECHANISM TO AUTOMATIC UPDATING OBSOLETE  TELEPHONE NUMBERS"  IBM TECHNICAL DISCLOSURE BULLETIN,  vol. 37, no. 4A,  1 April 1994 (1994-04-01), page 115/116  XP000446205  ISSN: 0018-8689</p> <p style="text-align: center;">-----</p>	<p>1,6</p>

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/09595

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 10091859 A	10-04-1998	US 5857073 A	05-01-1999

Form PCT/ISA/210 (patent family annex) (July 1992)